collingwood

light your moment

Rack bay



Aisle Pay-back

Designed to perform
Connected to save energy

Rack Bay

Save energy, money & time

0-10V	Wattage/ lumen	DALI-2	Wattage / lumen
LBR1V	60-80-100W - 8700-15000lm	LBR1D	100W - 14500-15000lm
LBR2V	160-180-200W - 22400-30000lm	LBR2D	200W - 28000-30000lm
LBR3V	200-220-240W - 28000-36000lm	LBR3D	240W - 33600-36000lm

Wattage switchable

Rack bay provides both the output of a single wattage or three wattages within the same product. Adjust the wattage switch during installation.

Product	0-10V output	Product	DALI-2 output
LBR1V	60-80-100W	LBR1D	100W
LBR2V	160-180-200W	LBR2D	200W
LBR3V	200-220-240W	LBR3D	240W

Light quality (CCT switchable)

Choose the ideal CCT for the environment you are using your Rackbay. 2 colour temperatures which can be switched during installation.

3000K Warm White




4000K Cool White



Sensors & Emergency Bolt-on

HBDLS	Daylight harvesting sensor with photocell	EMBOLTMRACK	Manual-test racking emergency bolt-on
HBPIRDLD	Motion sensor - daylight dimming/harvesting	EMBOLTSRACK	Self-test racking emergency bolt-on
HBMWS	Microwave sensor - daylight threshold switch	LB2XBRKT	2 x Mounting brackets
HBREM	Remote control for commissioning		

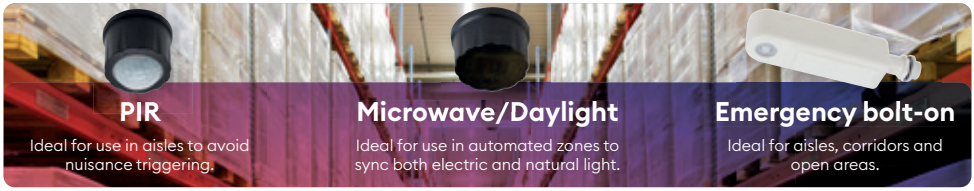

Quick & easy installation

Tool-less, plug-in and twist sensors make installation quick & easy for you to adopt lighting control, even interchange your sensors should your floorspace be re-configured.

Takes under **3 seconds**

IK07 & IP20

High impact resistance ensures that accidental collisions will not adversely effect the performance of the product. Combine this with IP20 resistance, meaning a great choice for warehouse racking areas.

IK07 IP20

Warranty

100,000 hours, L70 lifetime for piece of mind.

5 year guarantee

2 year on-site warranty